




## CAMBRIDGE BED

# Assembly Instructions

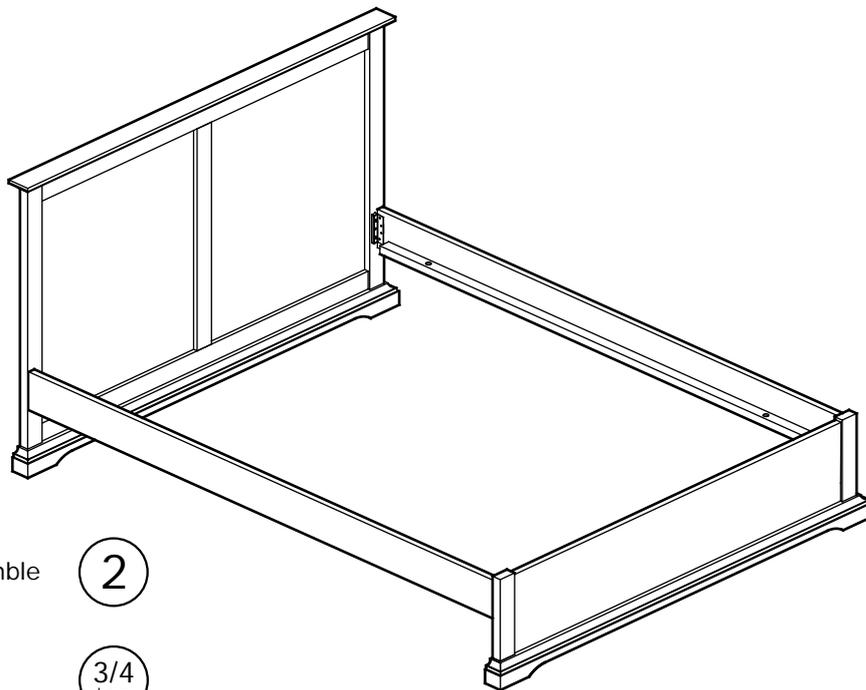

Minimum No. of people recommended to assemble this product :

2

Approx assembly time :

3/4  
hour


**Before you  
Start, here  
is some  
helpful advice**

1. We suggest you spend a short time reading through this leaflet and then follow the simple step by step instructions.
2. If you follow the instructions carefully the end result should be worth the effort.
3. Do not discard any of the packaging until you have checked that you have all the parts and the pack of fittings.
4. Assemble this product on a carpet.
5. To ensure an easier assembly, we strongly advise that all fittings are only finger tightened during initial assembly.
6. We recommend a periodic check on all fixing points to make sure they remain fully tightened.
7. Keep glue and fittings out of children's reach.

In the unlikely event that this product has missing or damaged parts, please call 0844 292 0000 to obtain spares

## Component parts and fittings contained in the box

### PARTS

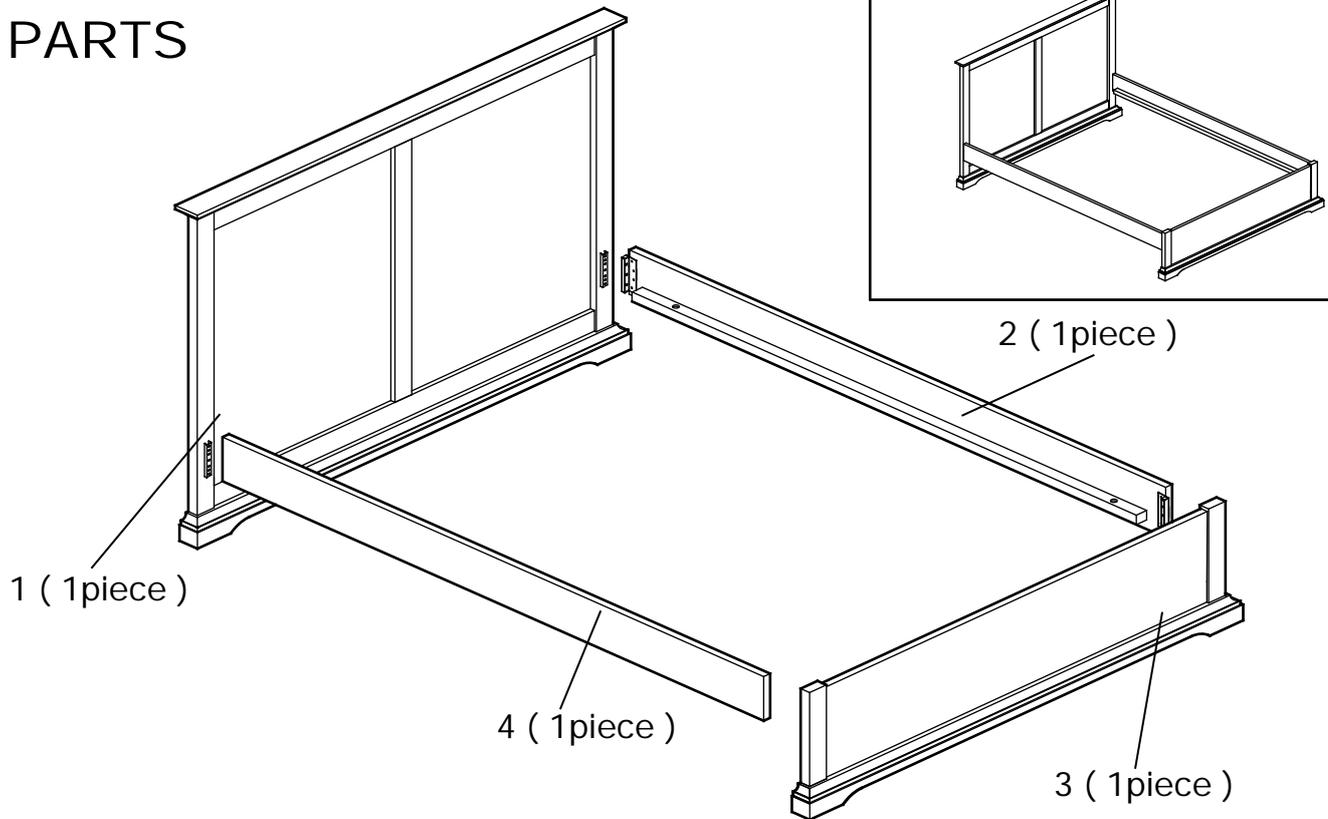



### FITTINGS

C		x 04pcs	H		(M6x20)	x 04pcs
D		x 02pcs	I			x 06pcs
E		x 01pc	J		(4x35)	x 06pcs
F		x 08pcs				
G		(M6x45) x 04pcs				

Note : The following fittings will be found in the box which contains the Slat Frame, NOT with the rest of Assembly Kit

K		x 02pcs	L		x 08pcs
M		x 01pc			


# ASSEMBLY

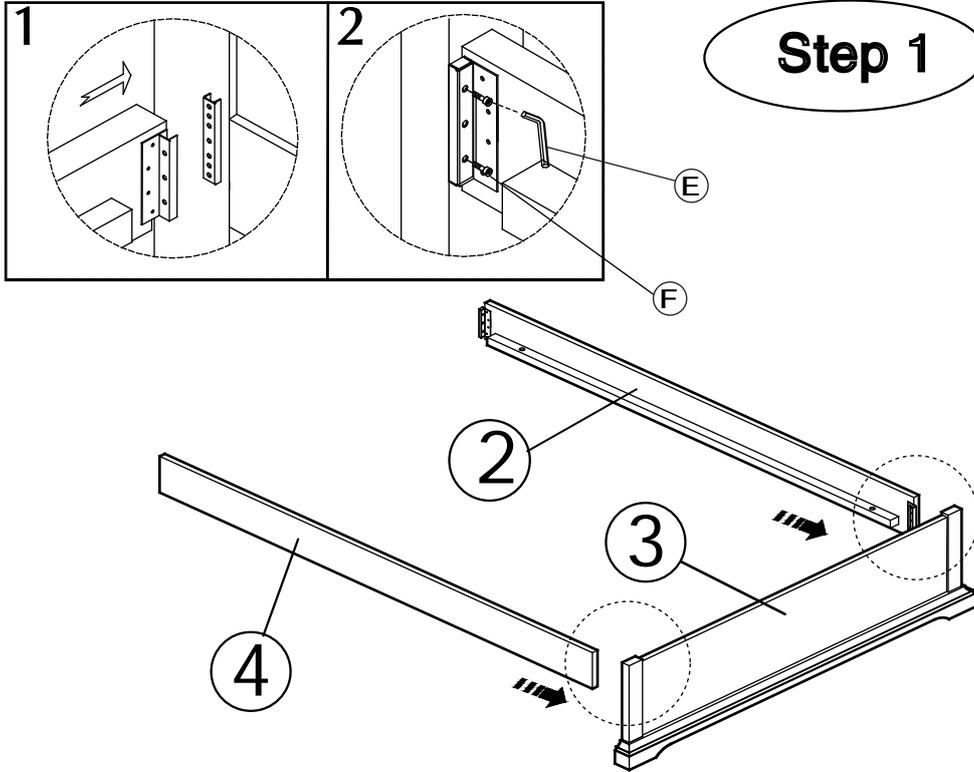

## Step 1

Connect Side Rails 2 and 4 to Footboard 3 with Screws F by using Allen key E.

**Note :** Do not fully tighten at this point

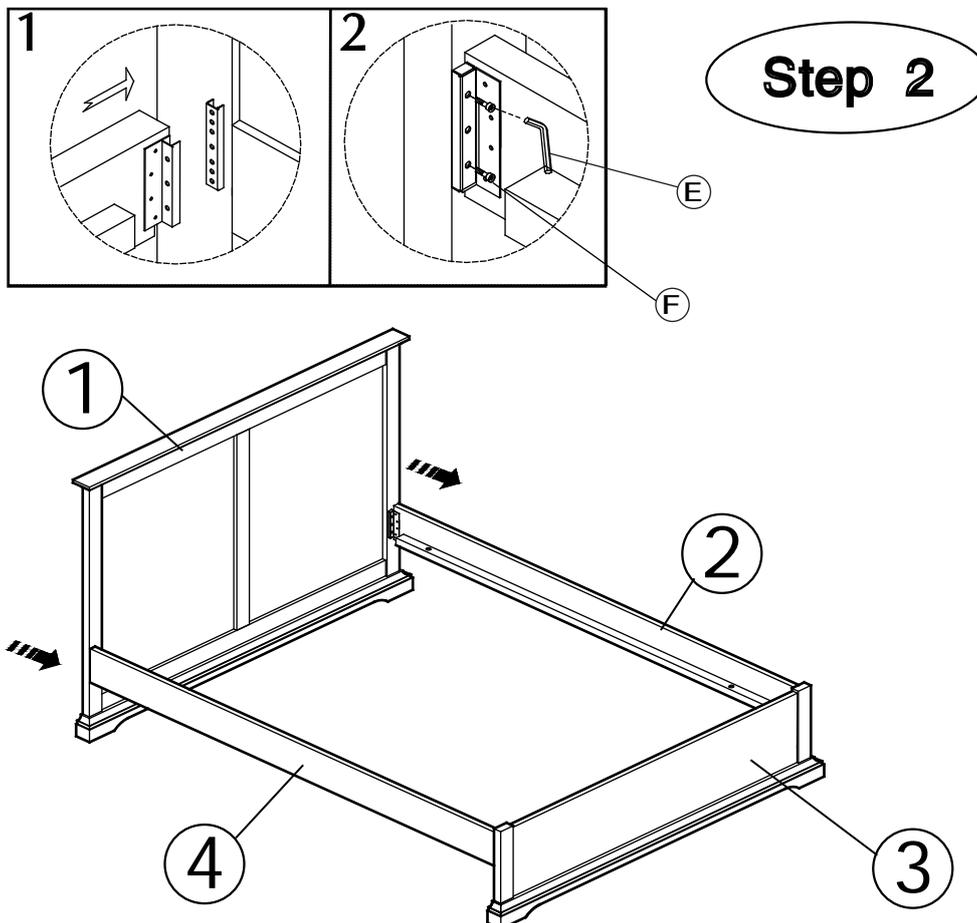


## Step 2

Repeat the process outlined in step 1 with the Headboard 1. Once the side Rails 2 and 4 have been connected to both the Headboard 1 and footboard 3, fully tighten all screws, using Allen Key E as shown




Identify the slat system you have purchased...



### Sprung slat system

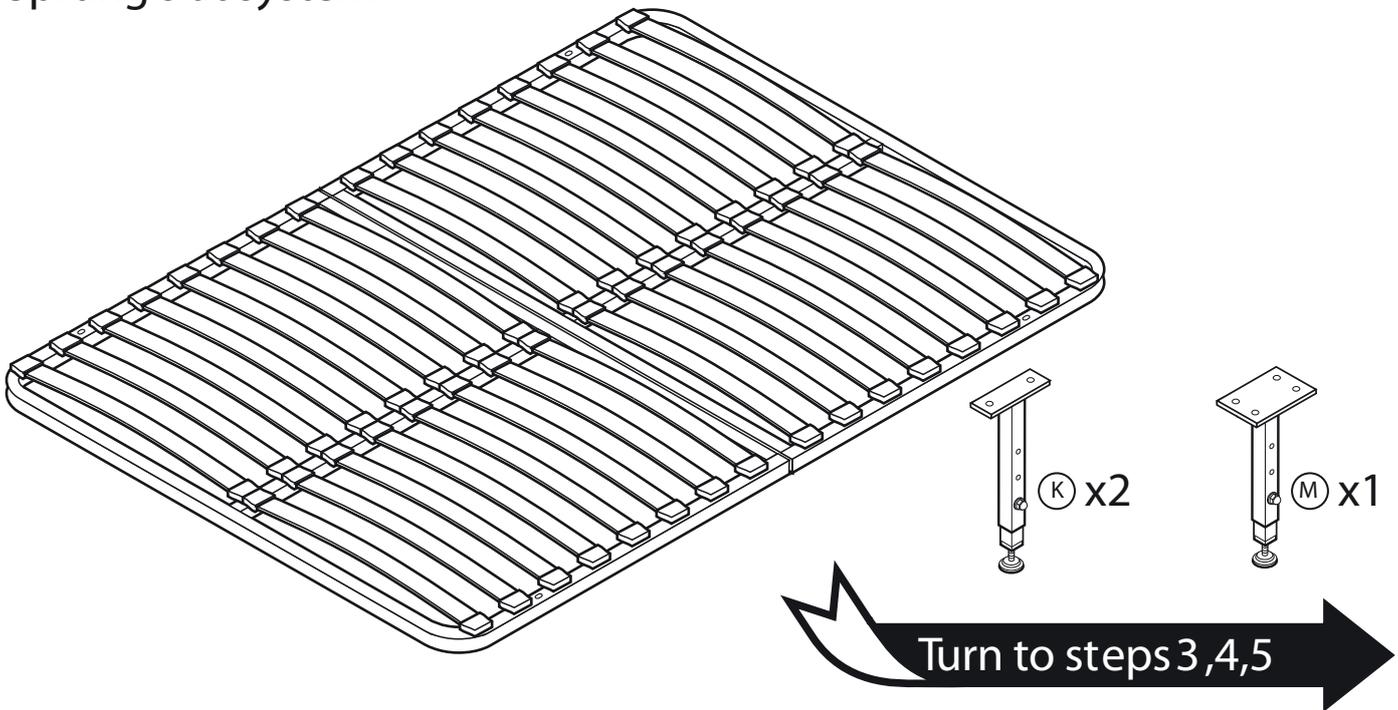


### Standard wooden slat system

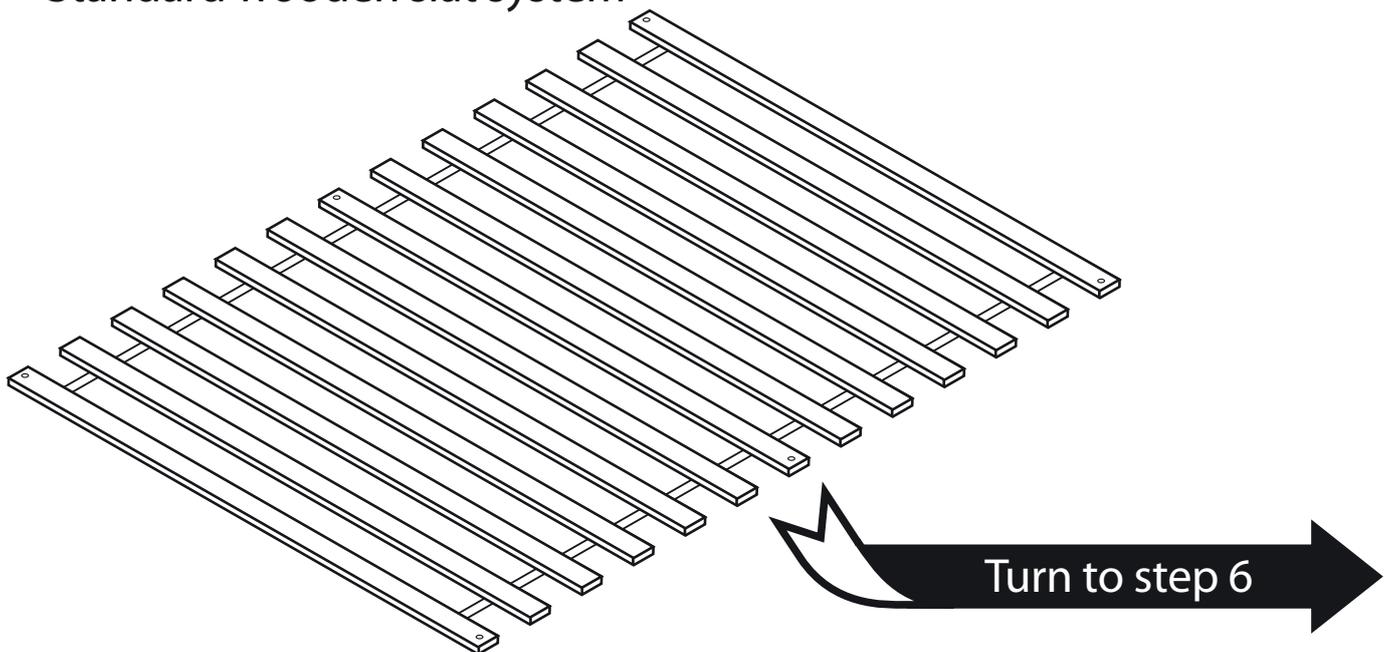


# Sprung Slat System Assembly

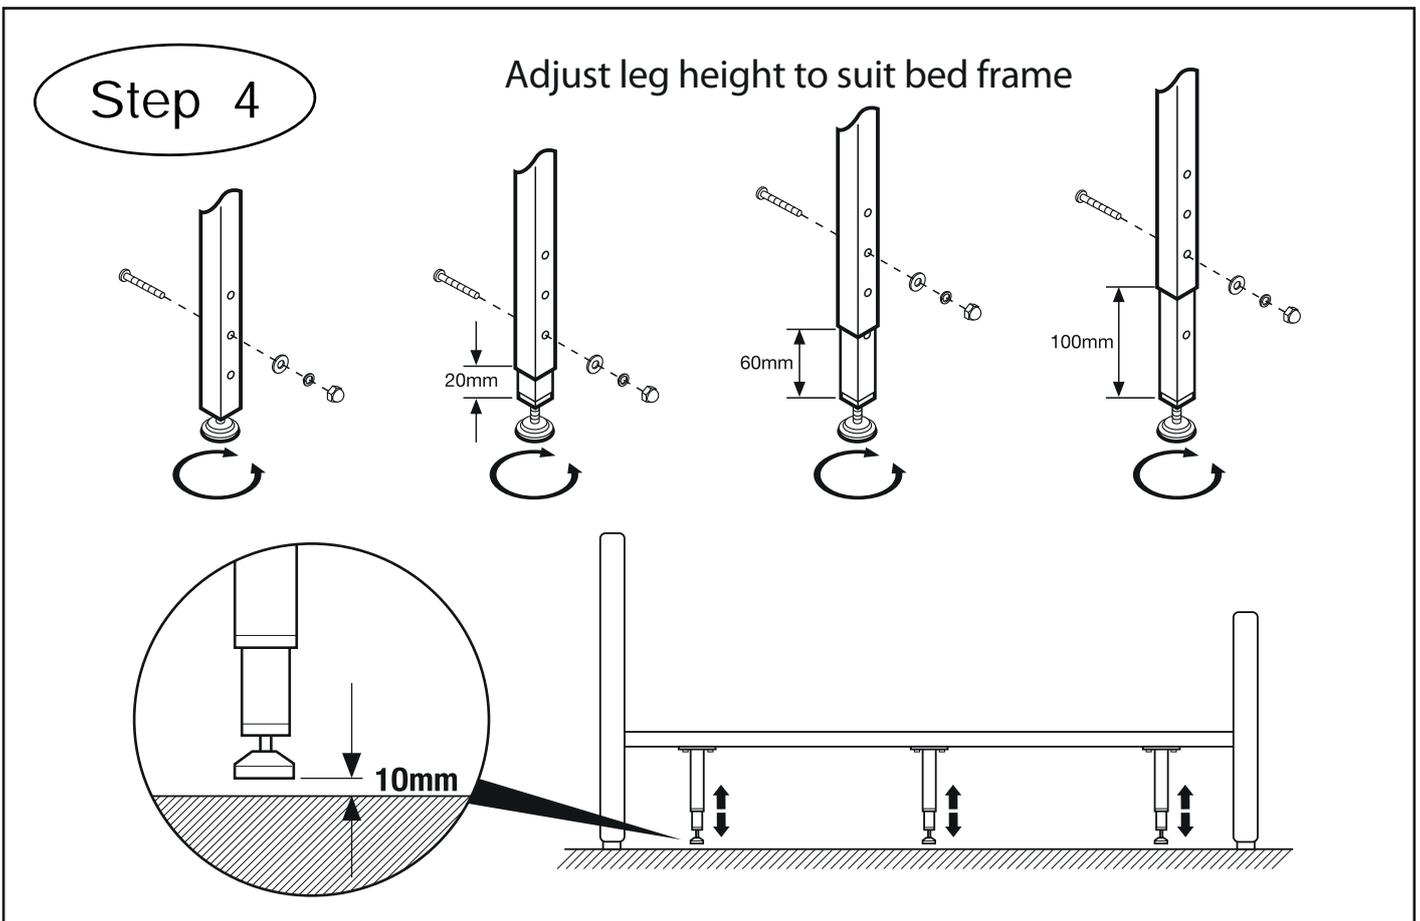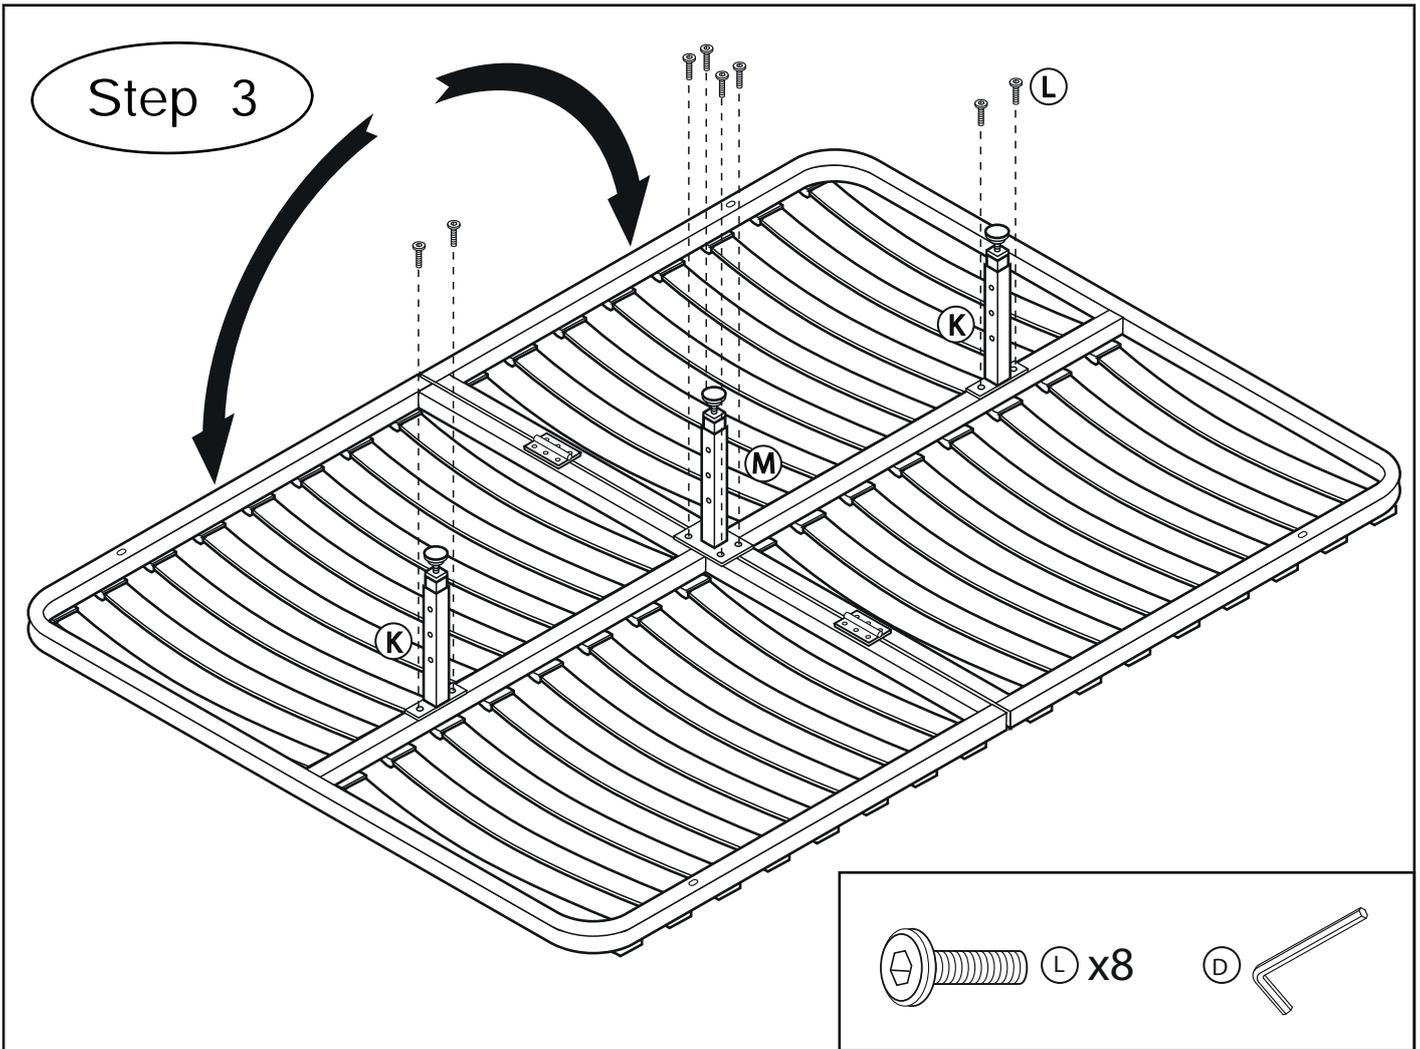

# ASSEMBLY




## Step 5

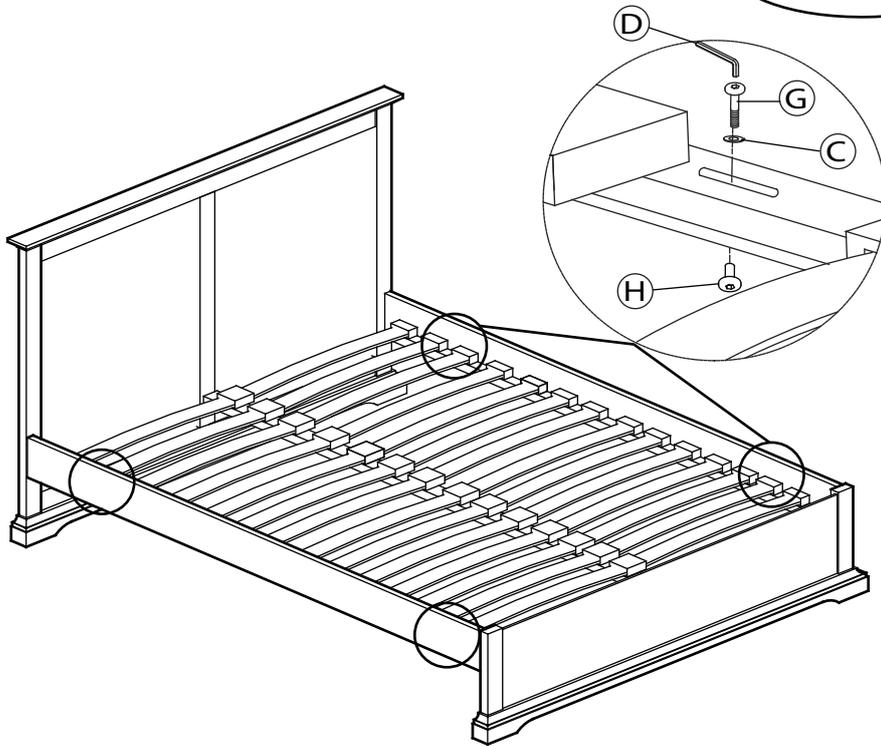

### DREAMS SPRUNG SLAT SYSTEM

Position the Slat Frame so that the holes in the Frame align with those in the Side Rails 2 and 4. Secure the Frame to the Side Rails by threading Bolt G through Washer C and through the holes in the frame and the Side Rails. Finally, tighten by JCN Nut H onto the Bolt G from the underside of the Side Rail, as shown

### FIXED WOOD SLAT ASSEMBLY

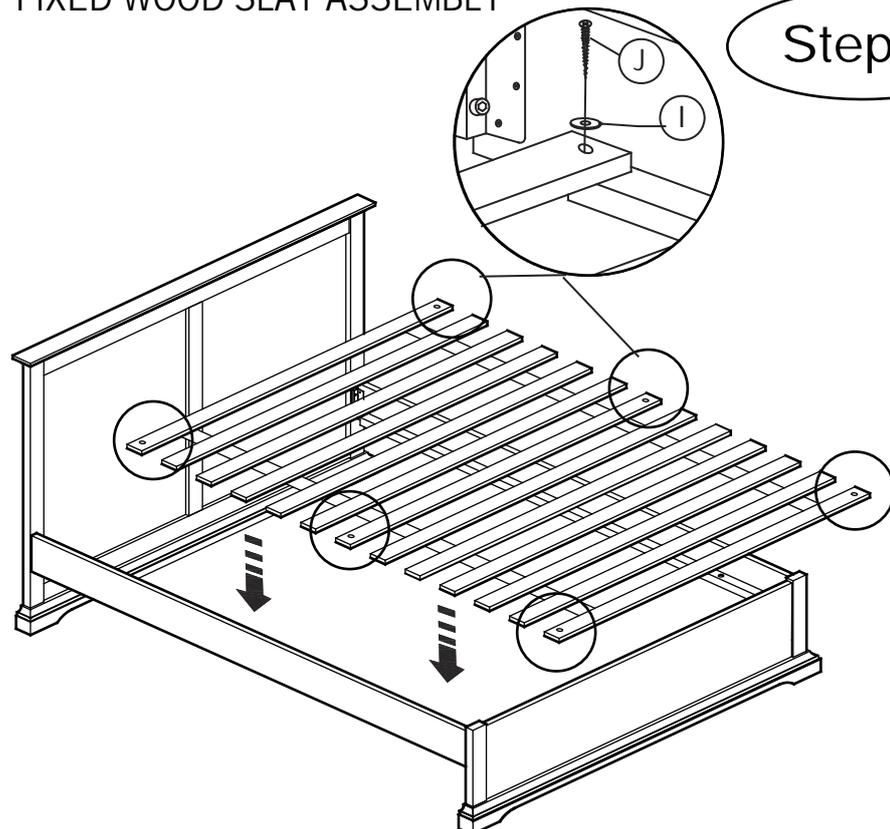

## Step 6

### DREAMS FIXED WOOD SLAT SYSTEM

Position the Solid Wood Slat so that the holes in the Slats align with those in the Side Rails 2 and 4. Secure the solid wood slats to the Side Rails by threading screw J through Washer I and through the holes in the slats and the Side Rails. Finally, tighten Screw J, using a screwdriver into the Side Rail, as shown